



Tunnel

Tunnel Stone Conveyor Oven.
Modularity to meet any professional requirement.

Tunnel



TS Electric



TS Gas

PATENTED
BREVETTATO

The Tunnel Stone (TS) conveyor oven is a high temperature oven that cooks directly on stone. It is excellent for cooking a variety of products such as pizza, flat bread, focaccia, tortillas, bruschetta, chicken wings, meat, etc. The TS conveyor oven guarantees much faster bake times than conventional impingement ovens, which means improved serving time to your customers. High temperatures and a stone surface create an authentic “wood style” finish in many products.

FEATURES

- Available in Natural Gas, LP Gas and Electric
- Stackable up to two (2) units for double or different production
- Composite ultrarock stone belt
- 18", 24" or 32" belt width for TSA, TSB and TSC respectively
- Adjustable temperature up to 842°F (450°C) Gas Model / 932°F (500°C) Electric Model
- Precise independent digital temperature controls for top and bottom.
- Digitally controlled conveyor speed from 1 - 20 minutes cooking time
- Heavy-gauge type 430 stainless steel exteriors
- High-heat resistant 17-gauge aluminized steel interiors
- Stainless steel stand with casters
- Extremely easy to maintain and service
- Fully insulated for cooler outer and consistent interior temperatures
- US made control components (Gas Model)
- Ignition failure alarm
- Stainless steel sheathed heating elements (Electric Model) / Atmospheric burners with safety valves (Gas Model)



OPTIONAL

- Tempered glass coating with custom design
- Extension tray at belt exit
- Automatic loading belt


Tunnel

Modularity to meet any professional requirement.

DIMENSIONS SINGLE CAVITY

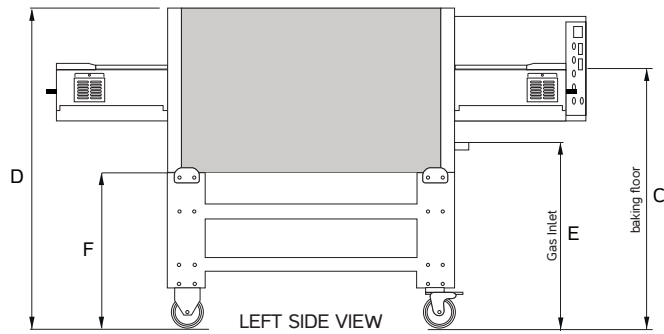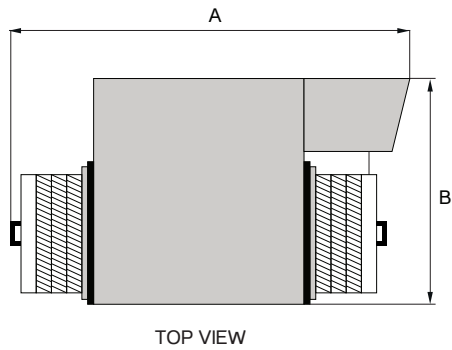

DIMENSIONS STACKED

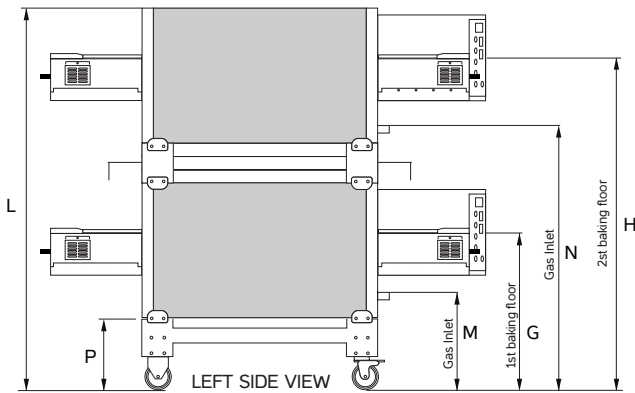

Model	Baking chambers	Conveyor length	Conveyor width
TSA Electric	4 ¹ / ₄ " x 21 ¹ / ₄ " x 32 ¹ / ₄ " (11 x 53 x 80)	57 ² / ₃ " (146.5)	17 ³ / ₄ " (45)
TSB Electric	4 ¹ / ₄ " x 26 ¹ / ₂ " x 45 (11 x 67 x 114)	71 ² / ₃ " (182)	23 ¹ / ₄ " (59)
TSC Electric	4 ¹ / ₄ " x 34 ¹ / ₂ " x 59 (11 x 87 x 150)	85 ³ / ₄ " (218)	31 ¹ / ₄ " (79)
TSB Gas	4 ¹ / ₄ " x 26 ¹ / ₂ " x 45 (11 x 67 x 114)	71 ² / ₃ " (182)	23 ¹ / ₄ " (59)
TSC Gas	4 ¹ / ₄ " x 34 ¹ / ₂ " x 45 (11 x 87 x 114)	71 ² / ₃ " (182)	31 ¹ / ₄ " (79)

Model	A	B	C	D	E	F	G	H	L	M	N	P
TSA Electric	71 ¹ / ₂ " (182)	43 ¹ / ₄ " (110)	41 ¹ / ₄ " (104.5)	50 ¹ / ₂ " (128)	N/A	30" (76)	33" (84)	54 ³ / ₄ " (139)	64" (162.5)	N/A	N/A	22" (55.5)
TSB Electric	85" (216)	48 ¹ / ₂ " (123)	41 ¹ / ₄ " (104.5)	50 ¹ / ₂ " (128)	N/A	30" (76)	33" (84)	54 ³ / ₄ " (139)	64" (162.5)	N/A	N/A	22" (55.5)
TSC Electric	99 ¹ / ₄ " (252)	56 ¹ / ₂ " (143)	41 ¹ / ₄ " (104.5)	50 ¹ / ₂ " (128)	N/A	30" (76)	33" (84)	54 ³ / ₄ " (139)	64" (162.5)	N/A	N/A	22" (55.5)
TSB Gas	85" (216)	46 ¹ / ₂ " (118)	41 ¹ / ₄ " (104.5)	50 ¹ / ₂ " (128)	25" (64)	24 ¹ / ₂ " (62)	27 ¹ / ₂ " (70)	58 ¹ / ₄ " (148)	67 ³ / ₄ " (172)	12" (30)	42 ¹ / ₂ " (108)	11" (28)
TSC Gas	85" (216)	54 ¹ / ₂ " (138)	41 ¹ / ₄ " (104.5)	50 ¹ / ₂ " (128)	25" (64)	24 ¹ / ₂ " (62)	27 ¹ / ₂ " (70)	58 ¹ / ₄ " (148)	67 ³ / ₄ " (172)	12" (30)	42 ¹ / ₂ " (108)	11" (28)

* Measurements in parentheses are in centimeters

TECHNICAL CHART

Tunnel	Power	Supply	Amperage	Shipping Weight	Shipping Volume
		V / Ph / Hz	A	lbs / Kg	CuFt
TSA-E	12.5KW	208-240 / 3 / 50-60	35-31	640 / 290	102
TSB-E	21.5KW	208-240 / 3 / 50-60	60-53	926 / 420	123
TSC-E	35KW	208-240 / 3 / 50-60	98-87	1213 / 550	130
TSB-Gas	115,000 BTU	120 / 1 / 50-60	1.3	992 / 450	123
TSC-Gas	150,000 BTU	120 / 1 / 50-60	1.3	1280 / 580	130

Italforni USA, Inc.
24418 South Main St. Suite 408
Carson, CA 90745 USA

P +1 424.364.0075
F +1 844.273.6873
support@ItalforniUSA.com
<http://ItalforniUSA.com>



The specifics shown in this document are to be considered not binding. Italforni Pesaro s.r.l. reserves the right to make technical changes without notice.



MADE IN ITALY